



TC-R3220 4HD 2HDD 20ch AI NVR

LK Series



KEY FEATURES

- Up to 20-ch IP camera accesses
- Incoming/Outgoing bandwidth: 400Mbps(AI on: 200Mbps)/400Mbps(AI on: 200Mbps)
- S+265, H.265, S+264, H.264 video formats
- Max. decoding capability: 16MP(30fps)×3 or 1080P(30fps)×20
- 16-ch synchronous playback
- Up to 18 TB capacity for each HDD
- Simultaneous HDMI and VGA outputs
- HDMI output at up to 4K resolution
- 2×RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
- S+ 265 compression effectively reduces the storage space by up to 75%
- Support cloud upgrade


SPECIFICATIONS

Video and Audio	
Access Channel	20
Incoming Bandwidth	400Mbps(AI on: 200Mbps)
Outgoing Bandwidth	400Mbps(AI on: 200Mbps)
Resolution	16MP/12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Preview Decoding Capability	16MP(30fps)×3, 12MP(30fps)×4, 8MP(30fps)×6, 6MP(30fps)×8, 5MP(30fps)×9, 4MP(30fps)×12, 3MP(30fps)×16, 1080P(30fps)×20, 720P(30fps)×20, 4CIF(30fps)×20 (AI on: 16MP(30fps)×1, 12MP(30fps)×2, 8MP(30fps)×3, 6MP(30fps)×4, 5MP(30fps)×4, 4MP(30fps)×6, 3MP(30fps)×8, 1080P(30fps)×12, 720P(30fps)×20, 4CIF(30fps)×20)
Playback Decoding Capability	16MP(30fps)×3, 12MP(30fps)×4, 8MP(30fps)×6, 6MP(30fps)×8, 5MP(30fps)×9, 4MP(30fps)×12, 3MP(30fps)×16, 1080P(30fps)×16, 720P(30fps)×16, 4CIF(30fps)×16 (AI on: 16MP(30fps)×1, 12MP(30fps)×2, 8MP(30fps)×3, 6MP(30fps)×4, 5MP(30fps)×4, 4MP(30fps)×6, 3MP(30fps)×8, 1080P(30fps)×12, 720P(30fps)×16, 4CIF(30fps)×16)
Third-party Camera Access	ONVIF(Profile S/T); RTSP
HDMI Output	HDMI: 800×600(60Hz), 1024×768(60Hz), 1280×720(50Hz/60Hz), 1280×800(60Hz), 1280×1024(60Hz), 1366×768(60Hz), 1440×900(60Hz), 1920×1080(50Hz/60Hz), 2560×1440(30Hz/60Hz), 2560×1600(60Hz), (4K)3840×2160(30Hz/60Hz)
VGA Output	VGA: 800×600(60Hz), 1024×768(60Hz), 1280×720(50Hz/60Hz), 1280×800(60Hz), 1280×1024(60Hz), 1366×768(60Hz), 1440×900(60Hz), 1920×1080(50Hz/60Hz)
Multi-screen Display	Simultaneous Output: HDMI: 1/2A/2B/3/4/5/6/7/8/9/10/12/13/16/20A/20B/20C/20D/25 VGA: 1/2A/2B/3/4/5/6/7/8/9/10/12/13/16/20A/20B/20C/20D/25
Audio Input	1-ch, 3.5mm
Audio Output	1-ch, RCA (Linear, 1 KΩ)
Two-Way Audio	1-ch, 3.5mm, using the audio input
Compression Standard	
Video Compression	S+265; H.265; S+264; H.264
Audio Compression	G.711A; G.711U; AAC; ADPCM_D
Stream Type	Video; Video & Audio
Network	
Network Protocol	802.1X; ARP; DDNS; DHCP; DNS; Easy DDNS; FTP; HTTP; HTTPS; ICMP; IGMP; IPv4; IPv6; Multicast; NFS; NTP; PPPoE; QoS; RTCP; RTP; RTSP; SMB/CIFS; SMTP; SNMP v1/v2/v3; SRTP; SSH; SSL; TLSv1.2; TCP; UDP; Unicast; UPnP
Client	Easy7 VMS (Win, MAC OS)
Mobile Client	EasyLive Plus (Android, iOS)
System Compatibility	ONVIF(Profile S/T/G); RTSP; CGI; SDK; P2P
Web	IE10+; Firefox52+; Edge89+; Safari11+; Chrome57+
Recording Playback	
Multi-channel Playback	16
Record Mode	Manual Recording; Alarm Recording; Schedule Recording

Storage Method	Local HDD
Backup	USB storage device, Network
Playback Function	Play/Pause/Stop/Reverse/Slow/Speed/Backwards 30s/Forwards 30s/Full Screen/Backup (Video Editing)/Step/Digital Zoom/Instant Replay
Dual Stream Record	Yes
Alarm	
General Alarm	Motion Detection; Mask Alarm; Alarm Input(IPC); Alarm Input(NVR)
Exceptions Alarm	Video Loss; Network Disconnected; No Disk; Illegal Access; Disk group space alert; Disk Full; Disk R/W Error; Recording Abnormal; Abnormal found in smart of disk; Abnormal temperature of the disk; Hot-spare Exception; Voltage Alarm(IPC); RTC Failure; IP Address Conflict; MAC Address Conflict; Disk Overload
Intelligent Analytics	
AI by Camera	Tripwire; Double Tripwire; Perimeter; Object Abandon; Object Missing; Running; Parking; Heatmap; Loitering; Video Abnormal; Audio Abnormal; On Duty Detection; Crowd Detection; Safety Helmet Detection; Electric Bicycle Detection; People Counting; Link to Tracking; Smoke and Fire Detection; Environmental Temperature Measurement; Face Detection; Human Body Temperature Measurement; Smart Alarm; Face Recognition; Human/Vehicle Classification; LPR
AI by NVR	Face Detection; Face Recognition; Tripwire; Double Tripwire; Perimeter; Smart Motion Detection; WisePick(Face, Human body); WiseSeek
Face Detection	
Face Attributes Detection	Gender; Age; Glasses; Face Mask
Face Recognition	
Face Recognition Performance	4-ch(1080P)/4-ch(3MP)/4-ch(4MP)/4-ch(5MP)/4-ch(6MP)/3-ch(8MP) video streams or 16-ch image streams
Face Picture Library	Up to 20 face libraries Up to 100000 base images
Face Picture Comparison	Yes
AI Performance(AI by NVR)	
Perimeter/Tripwire Performance	8-ch(1080P)/8-ch(3MP)/6-ch(4MP)/4-ch(5MP)/4-ch(6MP)/3-ch(8MP)
Smart Motion Dection Performance	8-ch(1080P)/8-ch(3MP)/6-ch(4MP)/4-ch(5MP)/4-ch(6MP)/3-ch(8MP)
WisePick Performance	1. Compatible with Tiandy AI cameras that support Face/Human classification, it can meet full-channel WisePick. 2. Compatible with normal(Tiandy non-AI or Third-part) cameras, after enabling WisePick by NVR, it can offer up to 8-channel WisePick.
WiseSeek Performance	1. Compatible with Tiandy AI cameras that support Face/Human/Vehicle classification, it can meet full-channel WiseSeek. 2. Compatible with normal(Tiandy non-AI or Third-part) cameras, it can offer up to 8-channel WiseSeek.
WiseSeek Language	English, Simple Chinese
Search	

VCA Search	Early-warning Search; Behavior Search; Safety Helmet Search; Thermographic Retrieval; Duty Search; Electric Bicycle Retrieval; Face Search(Search by face attributes/event/picture); Sleeping on Duty Detection; Smart Motion Detection; Human Search(Search by human attributes)
VCA Report	Heatmap; People Counting; Face Statistics
Face Attributes Search	Gender; Age; Glasses; Face Mask; Body Temp.
Human Attributes Search	Gender; Age; Backpack; Face Mask; Glasses; Hair; Carrying Status; Top Color; Bottom Color; Top Type; Bottom Type; Riding Status; Hat
Vehicle Attributes Search	Vehicle Color; Vehicle Type; Plate Color; Plate number; Non-Motor Vehicle Passenger Status; Direction
Storage	
HDD Capacity	Up to 18 TB capacity for each HDD
Disk Group	2 Disk Group
External Port	
USB	1×USB2.0; 1×USB3.0
HDMI	1×HDMI(supports up to 4K resolution output)
VGA	1×VGA
Network Interface	2×RJ-45, 10/100/1000 Mbps self-adaptive Ethernet port
SATA	2×SATA interface
RS-232	1×RS-232
RS-485	1×RS-485
Alarm I/O	4-ch, TTL inputs, 3mA, 3.3VDC; 2-ch, relay outputs, 1A, 24VDC
General	
UI Language	Simple Chinese; English
Power Supply	DC12V
Power Consumption	≤10W(HDD not included, idling)
NetWeight	1.65Kg
GrossWeight	2.75Kg
Boundary Dimensions	341(L)280(W)47(H)mm
Package Dimensions	415(L)140(W)375(H)
Operating Temperature	-10°C~+55°C (+14°F~+131°F)
Operating Humidity	10%~90%RH (non-condensing)
Storage Temperature	-20°C~+60°C (-4°F~+140°F)
Package Kit	Network Video Recorder*1; Screw Pack*2; Mouse*1; Power Adapter(DC12V 3A)*1; European Standard Power Cord*1; Instructions*1; Parts List*1

DIMENSIONS (Unit: mm)

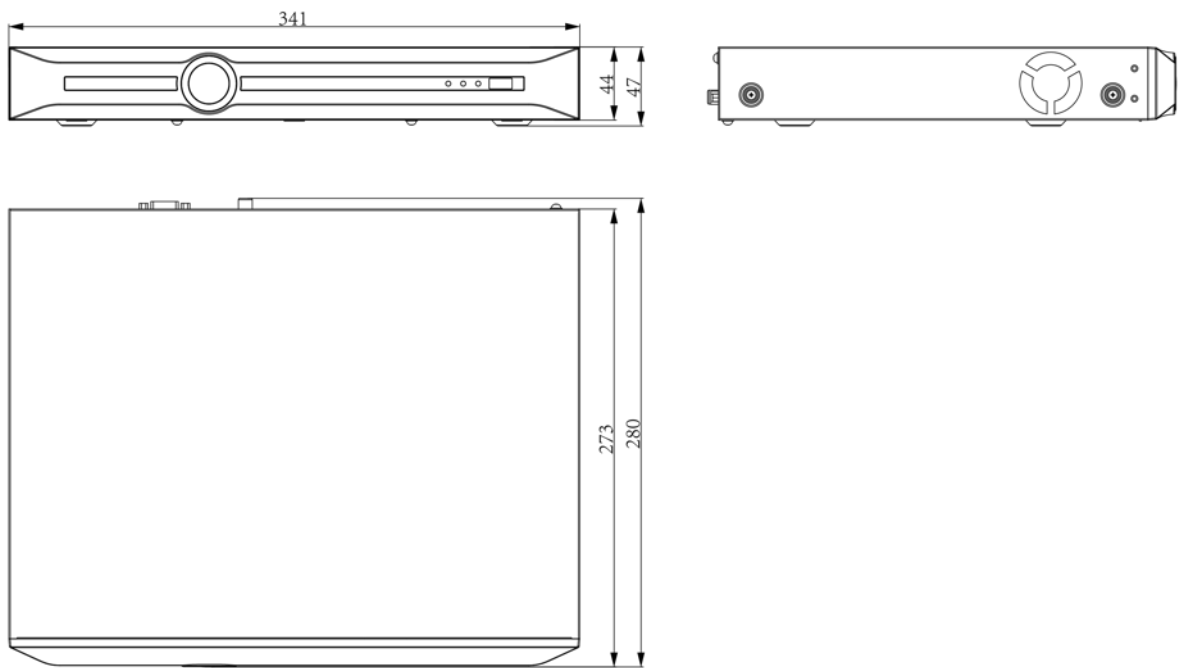

Physical Interfaces

